



CMS8S588x Datasheet

Enhanced 1T 8051 microcontroller with flash memory

Rev.1.0.3

Please be reminded about following CMS's policies on intellectual property

* Cmsemicon Limited(denoted as 'our company' for later use) has already applied for relative patents and entitled legal rights. Any patents related to CMS's MCU or other products is not authorized to use. Any individual, organization or company which infringes our company's intellectual property rights will be forbidden and stopped by our company through any legal actions, and our company will claim the lost and required for compensation of any damage to the company.

* The name of Cmsemicon Limited and logo are both trademarks of our company.

* Our company preserve the rights to further elaborate on the improvements about products function, reliability and design in this manual. However, our company is not responsible for any usage about this manual. The applications and their purposes in this manual are just for clarification, our company does not guarantee that these applications are feasible without further improvements and changes, and our company does not recommend any usage of the products in areas where people's safety is endangered during accident. Our company's products are not authorized to be used for life-saving or life support devices and systems. Our company has the right to change or improve the product without any notification, for latest news, please visit our website: www.mcu.com.cn

1. Product Features

1.1 Features

- ◆ **Compatible with MCS-51 1T instruction system**
 - The system clock frequency supports up to 48MHz
 - The fastest machine cycle supports $1T_{SYS}$ @ $F_{SYS} \leq 24MHz$
 - The fastest machine cycle supports $2T_{SYS}$ @ $F_{SYS}=48MHz$
- ◆ **Memory**
 - program FLASH:32Kx8Bit
 - Data FLASH:1Kx8Bit
 - General RAM:256x8Bit
 - General XRAM:2Kx8Bit
 - Support BOOT function area, 1K/2K/4K optional
 - Program FLASH supports partition protection
- ◆ **4 oscillation modes**
 - HSI- Internal high-speed oscillation:48MHz
 - HSE- External high-speed oscillation: 8MHz/ 16MHz
 - LSE- External low-speed oscillator:32.768KHz
 - LSI- Internal low-speed oscillator:125KHz
- ◆ **GPIO**
 - Up to 30 GPIO
 - All support up/down resistance function
 - All support edge (rising edge/ falling edge/ double edge) interrupt
 - Support wake-up function
- ◆ **Interrupt source**
 - Support all external port interrupts
 - 7 timer interrupts
 - Other peripheral interrupts
- ◆ **Timer**
 - WDT wake-up (watchdog timer)
 - Timer0/1, Timer2, Timer3/4
 - LSE_Timer (Support sleep wake function)
 - WUT (wake-up wake-up)
 - BRT (Serial port baud rate clock generator)
- ◆ **Cyclic redundancy check**
 - CRC16 (CRC16-CCITT)
- ◆ **Operating voltage range**
 - 2.1V~5.5V
- ◆ **Operating temperature range**
 - -40°C~105°C
- ◆ **Low voltage reset function (LVR)**
 - 1.8V/ 2.0V/ 2.5V/ 3.5V
- ◆ **Low-voltage detection function (LVD)**
 - 2.0V~4.3V 8 levels optional
- ◆ **High-precision 12-bit ADC**
 - Up to 30 AD external channels
 - Optional reference voltage (1.2V/ 2.0V/ 2.4V/ 3.0V/ VDD)
 - Can detect internal 1.2V reference voltage
 - Support hardware trigger start conversion function
 - Support a set of result digital comparison function
- ◆ **Buzzer driver**
 - 50% duty cycle, frequency can be set freely
- ◆ **PWM**
 - 6 channels PWM
 - 6 mutually independent cycle counters
 - Support independent /complementary/ synchronous/ group mode
 - Support edge alignment
 - Support complementary mode dead zone delay function
- ◆ **Communication modules**
 - 1 x SPI (communication rate up to 6Mb/s)
 - 1 x I²C (communication rate up to 400Kb/s)
 - 2 x UART (baud rate up to 1Mb/s)
 - UART1 can be mapped to any GPIO
- ◆ **Low power mode**
 - Idle mode (IDLE)
 - Sleep mode (STOP)
- ◆ **Support 96-bit unique ID number (UID)**
 - Each chip has an independent ID number
- ◆ **Support two-wire serial programming and debugging**

1.2 Product Comparison

Product mode		CMS8S5887	CMS8S5888	CMS8S5889
Peripheral interface				
Maximum clock frequency		Fsys=48MHz, Fcpu=24MHz		
Storage module	APROM	32/31/30/28 KB ⁽¹⁾		
	BOOT	0/1/2/4 KB ⁽¹⁾		
	Data FLASH	1 KB		
	RAM	256 B		
	XRAM	2 KB		
Timer	WDT	1		
	Timer0/1	2 (16bit)		
	Timer2	1 (16bit)		
	Timer3/4	2 (16bit)		
	LSE_Timer	1 (16bit)		
	WUT	1 (12bit)		
	BRT	1 (16bit)		
Enhanced Digital peripherals	CRC	CRC16-CCITT		
	BUZZER	1		
	PWM	6(16bit)		
Communication module	SPI	1		
	I2C	1		
	UART	2		
Analog module	12bit-ADC ((Number of external channels))	18	22	30
GPIOs		18	22	30
LVR		1.8V/2.0V/2.5V/3.5V		
LVD		2.0~4.3V, 8 levels		
Operating voltage		2.1~5.5 V		
Operating temperature		-40~105 °C		
Encapsulation		TSSOP20, QFN20	QFN24	QFN32

Note: Set the size of APROM and BOOT space through the system configuration register, the maximum total of APROM and BOOT space is 32K

2. System Overview

2.1 System Introduction

The CMS8S589x series is an 8051 core, a 1T instruction system compatible with MCS-51, and a general IO type 8-bit chip. The operating frequency can reach up to 48MHz. The MCU has the following characteristics:


- With a maximum of 32KB program area、256B RAM space、2KB XRAM、1KB non-volatile data area.
- There are four oscillation modes, the system clock can be freely switched between the three clock sources (mutual switching between HSE and LSE is prohibited), and the external oscillator stops oscillation detection.
- It supports three working modes: normal, idle, and sleep, which can effectively reduce power consumption.
- Built-in low-voltage reset LVR, low-voltage monitoring LVD, watchdog overflow reset and other protection settings, can effectively improve the reliability of system operation.
- With multiple interrupt sources such as external interrupts, timed interrupts and other peripheral interrupts, it can respond to external events in a timely manner and improve the utilization of the MCU.
- Up to 9 timers, which can realize functions such as timing, counting, input capture, output comparison, timing wake-up, and baud rate generator
- With cyclic redundancy check unit CRC
- 6-channel 16-bit PWM, supports independent, complementary, and synchronous three-mode output, and has dead zone control function.
- With 1 I2C, 1 SPI, and 2 UART communication modules, it can realize data transmission between the system and other devices.
- It has a high-precision 12-bit ADC and can choose an internal reference voltage.

2.2 Memory Structure

2.2.1 Program Memory FLASH

This series has a maximum of 32KB of FLASH storage space, APROM area and BOOT area share the entire FLASH space.

The block diagram of the FLASH space allocation structure is as follows:

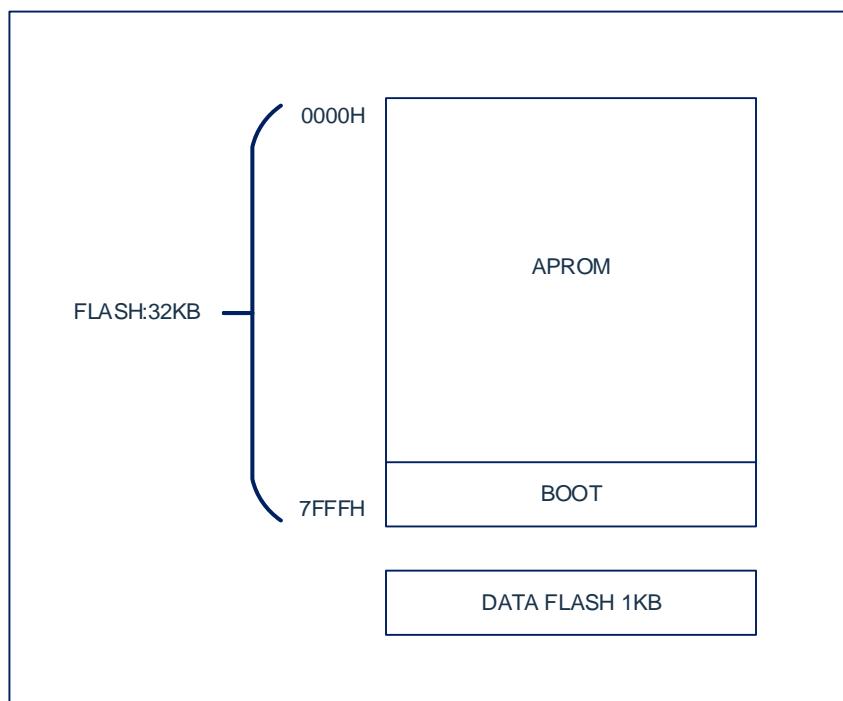


The size of BOOT can be configured, the configuration method is as follows:

32K (Program storage area)				
Address space allocation method	APROM area		BOOT area	
method 0	32K	0000H-7FFFH	--	--
method 1	31K	0000H-7BFFH	1K	7C00H-7FFFH
method 2	30K	0000H-77FFFH	2K	7800H-7FFFH
method 3	28K	0000H-6FFFH	4K	7000H-7FFFH


2.2.2 Internal Data Memory RAM

The internal data memory is divided into 3 parts: low 128Bytes, high 128Bytes, SFR. The structure diagram of RAM space allocation is shown in the figure below:

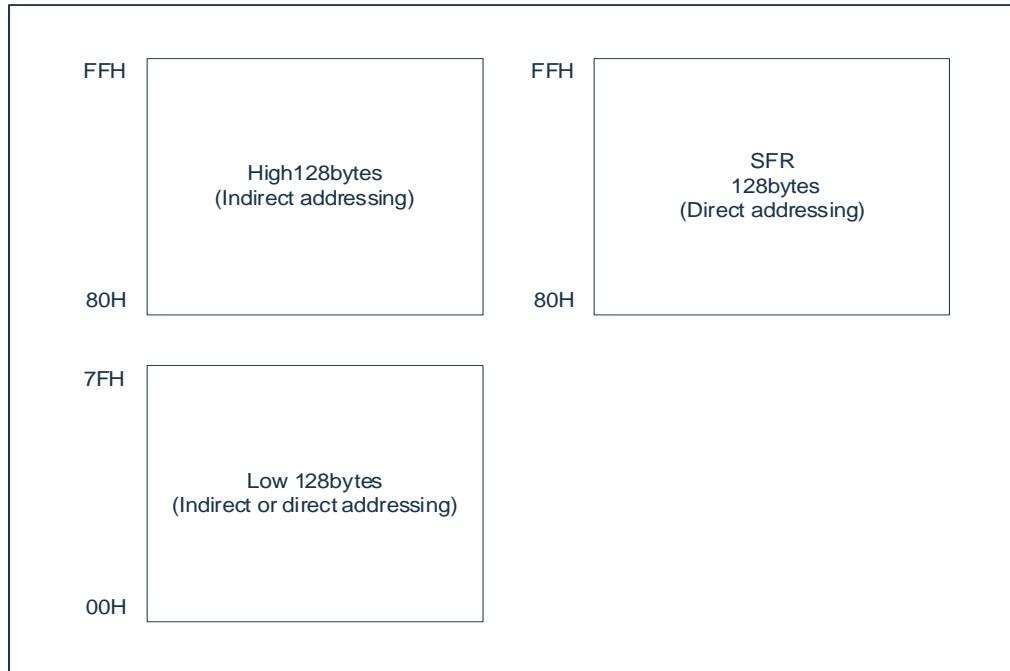


2.2.3 External Data Memory XRAM

There is a maximum 2KB XRAM area inside the chip, which is not related to RAM/FLASH. The structure diagram of XRAM space allocation is shown in the figure below.

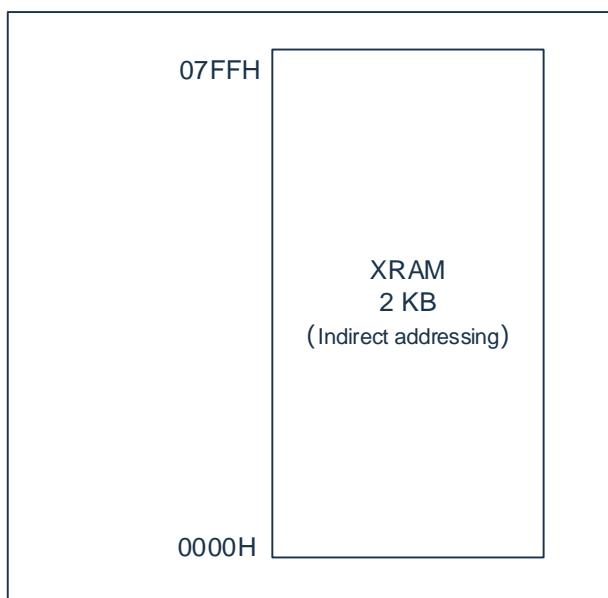

2.2.4 Special Function Register XSFR


XSFR is a special register shared by the addressing space of XRAM, which mainly includes: port control register and other function control registers. Its addressing range is as follows:

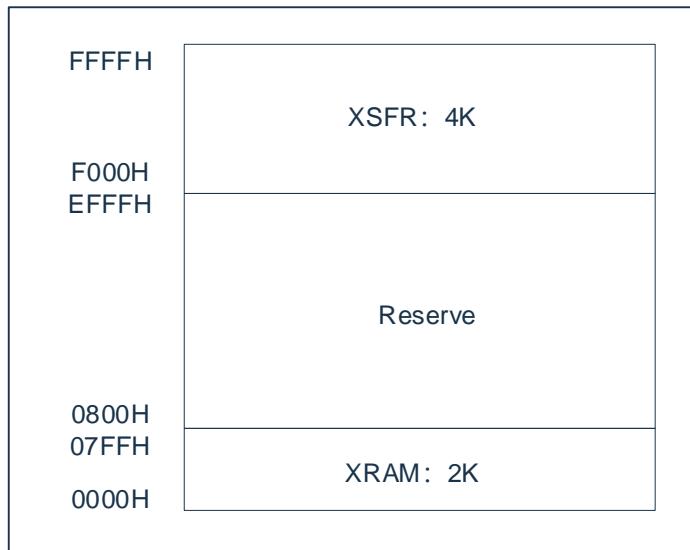

3. Pin Definition

3.1 Pin Description


3.1.1 CMS8S5887-TSSOP20 Pin Diagram

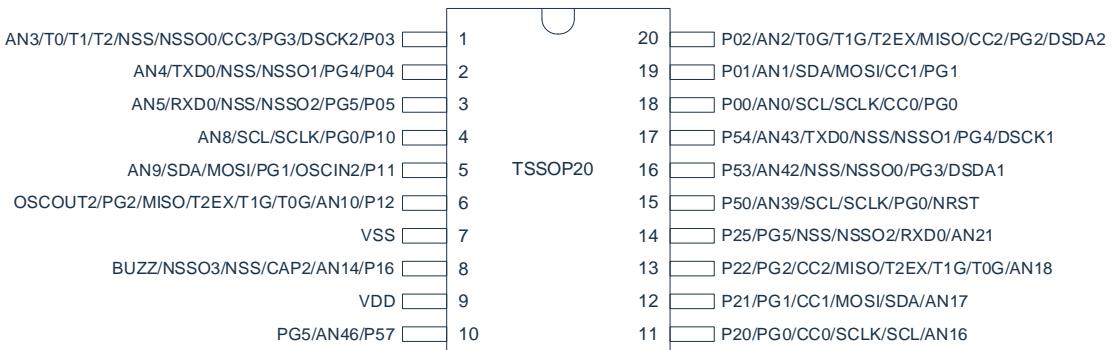


3.1.2 CMS8S5887-QFN20 Pin Diagram



3.1.3 CMS8S5888-QFN24 Pin Diagram

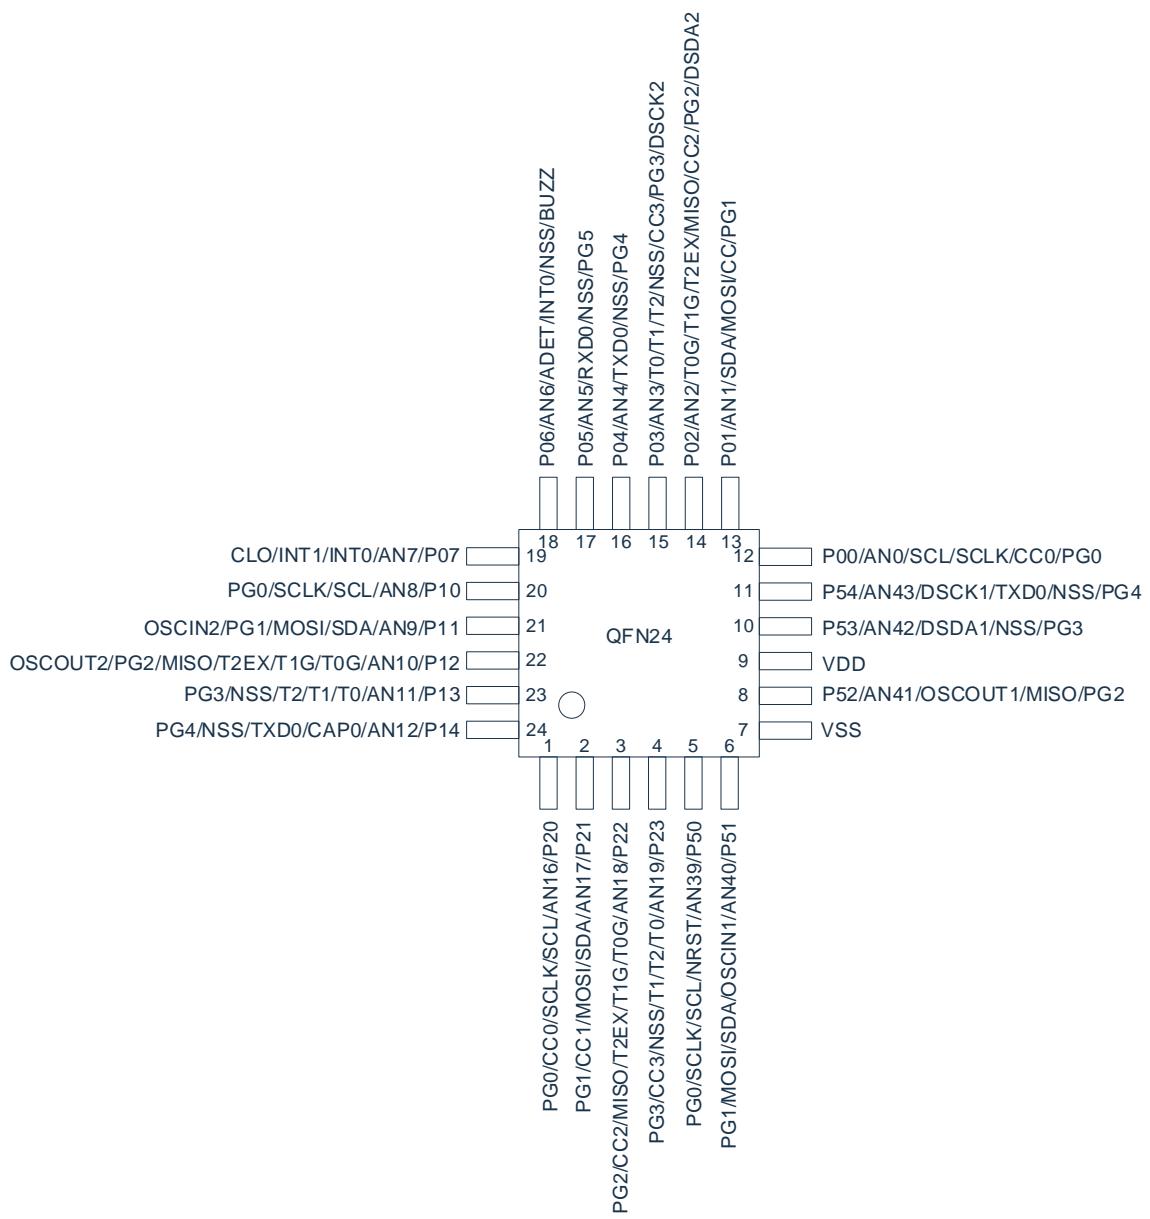

3.1.4 CMS8S5889-QFN32 Pin Diagram

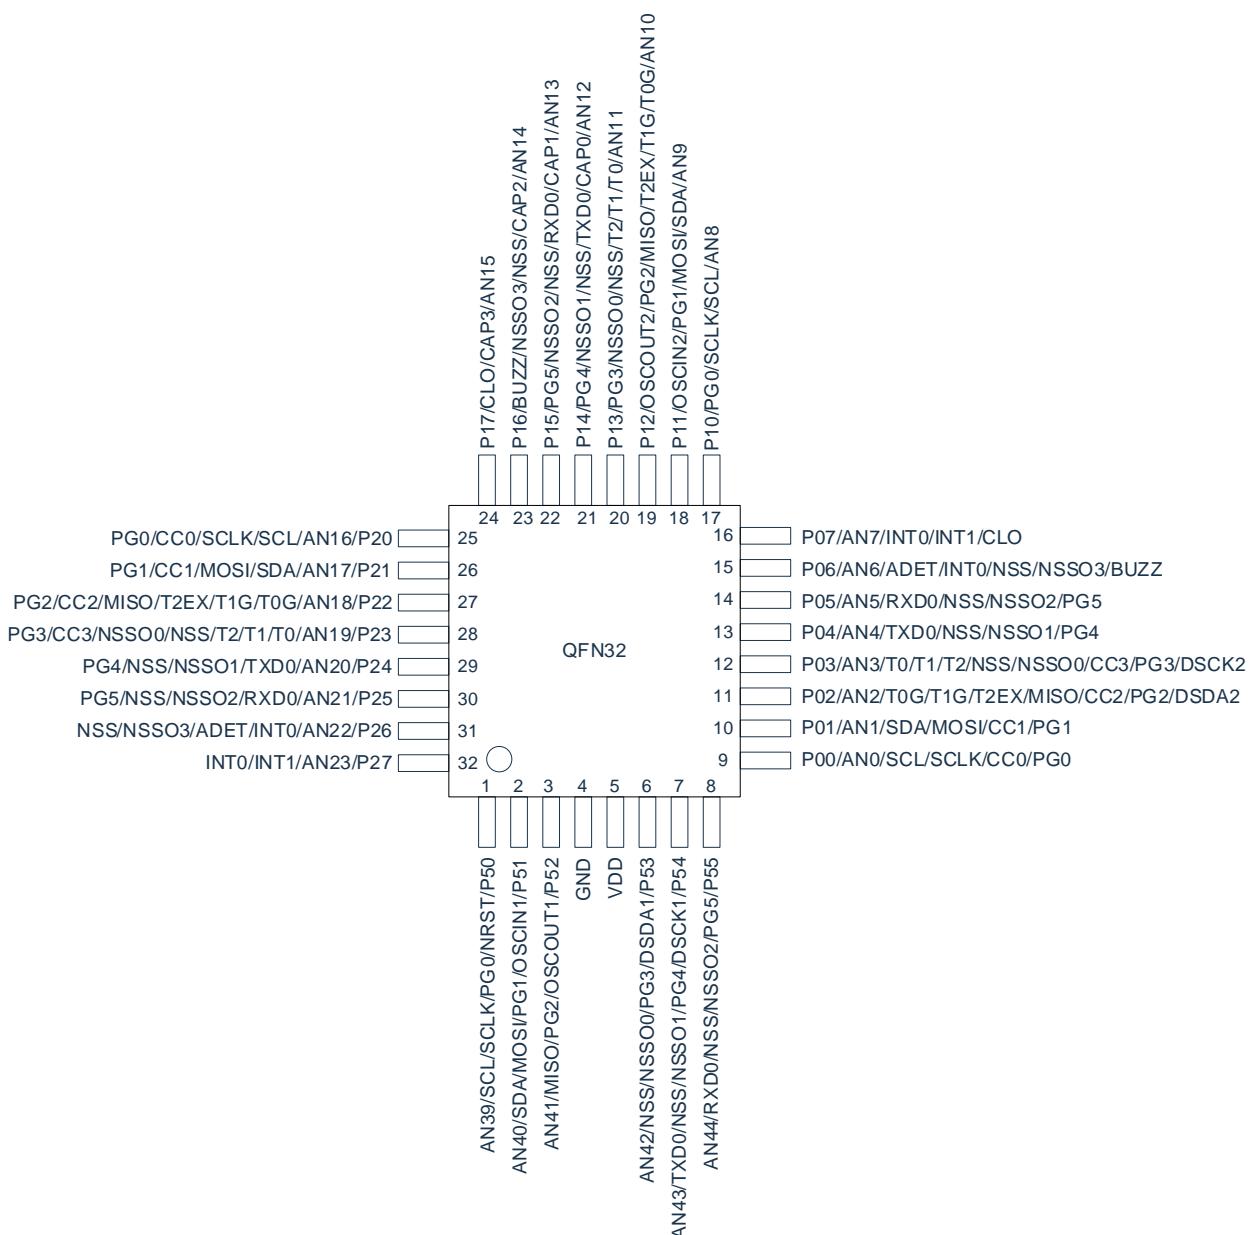

3.2 Pin Function Description

Symbol description: I/O means digital input/output, I means digital input, O means digital output, AI means analog input, AO means analog output.

Pin number				Pin Function	Pin Type	Pin description
CMS8S5887		CMS8S 5888	CMS8S 5889			
TSSOP20	QFN20	QFN24	QFN32			
18	15	12	9	P00	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN0	AI	ADC channel 0 input
				SCL	I/O	I2C clock input and output
				SCLK	I/O	SPI clock input and output
				CC0	O	Timer2 compare output channel 0
				PG0	O	PWM channel 0 output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
19	16	13	10	P01	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN1	AI	ADC channel 1 input
				SDA	I/O	I2C data input and output
				MOSI	I/O	SPI data master sending and slave receiving
				CC1	O	Timer2 compare output channel 1
				PG1	O	PWM channel 1 output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
20	17	14	11	P02	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN2	AI	ADC channel 2 input
				T0G	I	Timer 0 gate control input
				T1G	I	Timer 1 gate control input
				T2EX	I	Timer2 falling edge automatic reload input
				MISO	I/O	SPI data master receiving and slave sending
				CC2	O	Timer2 compare output channel 2
				PG2	O	PWM channel 2 output
				DSDA2	I/O	Programming/debugging data input and output port 2
				TXD1	O	UART1 data output
1	18	15	12	RXD1	I/O	UART1 Data input/synchronous mode data output
				P03	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN3	AI	ADC channel 3 input
				T0	I	Timer0 external clock input
				T1	I	Timer1 external clock input
				T2	I	Timer2 external event or gate control input

Pin number				Pin Function	Pin Type	Pin description
CMS8S5887		CMS8S 5888	CMS8S 5889			
TSSOP20	QFN20	QFN24	QFN32			
				NSS (NSSO0)	I/O	SPI slave chip select input/master chip select 1 output
				CC3	O	Timer2 compare output channel 3
				PG3	O	PWM channel 3 output
				DSCK2	I	Programming/debugging clock input port2
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
2	19	16	13	P04	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN4	AI	ADC channel 4 input
				TXD0	O	UART0 data output
				NSS (NSSO1)	I/O	SPI slave chip select input/master chip select 1 output
				PG4	O	PWM channel 4 output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
3	20	17	14	P05	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN5	AI	ADC channel 5 input
				RXD0	I/O	UART0 Data input/synchronous mode data output
				NSS (NSSO2)	I/O	SPI slave chip select input/master chip select 2 output
				PG5	O	PWM channel 5 output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
-	-	18	15	P06	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN6	AI	ADC channel 6 input
				ADET	I	ADC external trigger input
				INT0	I/O	External interrupt 0 input
				NSS (NSSO3)	I/O	SPI slave chip select input/master chip select 3 output
				BUZZ	O	Buzzer drive output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
-	-	19	16	P07	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN7	AI	ADC channel 7 input
				INT0	I/O	External interrupt 0 input
				INT1	I/O	External interrupt 1 input
				CLO	O	System clock frequency division output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output

Pin number				Pin Function	Pin Type	Pin description
CMS8S5887		CMS8S 5888	CMS8S 5889			
TSSOP20	QFN20	QFN24	QFN32			
4	1	20	17	P10	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN8	AI	ADC channel 8 input
				SCL	I/O	I2C clock input and output
				SCLK	I/O	SPI clock input and output
				PG0	O	PWM channel 0 output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
5	2	21	18	P11	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN9	AI	ADC channel 9 input
				SDA	I/O	I2C data input and output
				MOSI	I/O	SPI data master sending and slave receiving
				PG1	O	PWM channel 1 output
				OSCIN2	AI	External oscillation HSE input port 2
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
6	3	22	19	P12	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN10	AI	ADC channel 10 input
				T0G	I	Timer0 gate control input
				T1G	I	Timer1 gate control input
				T2EX	I	Timer2 falling edge automatic reload input
				MISO	I/O	SPI data master receiving and slave sending
				PG2	O	PWM channel 2 output
				OSCOUT2	AO	External oscillation HSE output port 2
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
-	-	23	20	P13	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN11	AI	ADC channel 11 input
				T0	I	Timer0 external clock input
				T1	I	Timer1 external clock input
				T2	I	Timer2 external clock input
				NSS (NSSO0)	I/O	SPI slave chip select input/master chip select 0 output
				PG3	O	PWM channel 3 output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
-	-	24	21	P14	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN12	AI	ADC channel 12 input

Pin number				Pin Function	Pin Type	Pin description	
CMS8S5887		CMS8S 5888	CMS8S 5889				
TSSOP20	QFN20	QFN24	QFN32				
				CAP0	I	Timer2 input capture channel 0	
				TXD0	O	UART0 data output	
				NSS (NSS01)	I/O	SPI slave chip select input/master chip select 1 output	
				PG4	O	PWM channel 4 output	
				TXD1	O	UART1 data output	
				RXD1	I/O	UART1 Data input/synchronous mode data output	
			22	P15	I/O	GPIO configures input and output pull up, down and other functions through registers	
				AN13	AI	ADC channel 13 input	
				CAP1	I	Timer2 input capture channel 1	
				RXD0	O	UART0 data input or synchronous mode data output	
				NSS (NSS02)	I/O	SPI slave chip select input/master chip select 2 output	
				PG5	O	PWM channel 5 output	
				TXD1	O	UART1 data output	
				RXD1	I/O	UART1 Data input/synchronous mode data output	
	8	5	23	P16	I/O	GPIO configures input and output pull up, down and other functions through registers	
				AN14	AI	ADC channel 14 input	
				CAP2	I	Timer2 input capture channel 2	
				NSS (NSS03)	I/O	SPI slave chip select input/master chip select 3 output	
				BUZZ	O	Buzzer drive output	
				TXD1	O	UART1 data output	
				RXD1	I/O	UART1 Data input/synchronous mode data output	
			24	P17	I/O	GPIO configures input and output pull up, down and other functions through registers	
				AN15	AI	ADC channel 15 input	
				CAP3	I	Timer2 input capture channel 3	
				CLO	O	System clock frequency division output	
				TXD1	O	UART1 data output	
				RXD1	I/O	UART1 Data input/synchronous mode data output	
	11	8	1	25	P20	I/O	GPIO configures input and output pull up, down and other functions through registers
					AN16	AI	ADC channel 16 input
					SCL	I/O	I2C clock input and output
					SCLK	I/O	SPI clock input and output
					CC0	O	Timer2 compare output channel 0
					PG0	O	PWM channel 0 output
					TXD1	O	UART1 data output
					RXD1	I/O	UART1 Data input/synchronous mode data output

Pin number				Pin Function	Pin Type	Pin description
CMS8S5887		CMS8S 5888	CMS8S 5889			
TSSOP20	QFN20	QFN24	QFN32			
12	9	2	26	P21	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN17	AI	ADC channel 17 input
				SDA	I/O	I2Cdata input and output
				MOSI	I/O	SPI data master sending and slave receiving
				CC1	O	Timer2 compare output channel 1
				PG1	O	PWM channel 1 output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
13	10	3	27	P22	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN18	AI	ADC channel 18 input
				T0G	I	Timer0 gate control input
				T1G	I	Timer1 gate control input
				T2EX	I	Timer2 falling edge automatic reload input
				MISO	I/O	SPI data master receiving and slave sending
				CC2	O	Timer2 compare output channel 2
				PG2	O	PWM channel 2 output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
-	-	4	28	P23	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN19	AI	ADC channel 19 input
				T0	I	Timer0 external clock input
				T1	I	Timer1 external clock input
				T2	I	Timer2 external event or gate control input
				NSS (NSSO0)	I/O	SPI slave chip select input/master chip select 0 output
				CC3	O	Timer2 compare output channel 3
				PG3	O	PWM channel 3 output
				TXD1	O	UART1data output
				RXD1	I/O	UART1Data input/synchronous mode data output
-	-	-	29	P24	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN20	AI	ADC channel 20 input
				TXD0	O	UART0data output
				NSS (NSSO1)	I/O	SPI slave chip select input/master chip select 1 output
				PG4	O	PWM channel 4 output
				TXD1	O	UART1data output
				RXD1	I/O	UART1Data input/synchronous mode data output
14	11	-	30	P25	I/O	GPIO configures input and output pull up, down

Pin number				Pin Function	Pin Type	Pin description
CMS8S5887		CMS8S 5888	CMS8S 5889			
TSSOP20	QFN20	QFN24	QFN32			and other functions through registers
				AN21	AI	ADC channel 21 input
				RXD0	I/O	UART0Data input/synchronous mode data output
				NSS (NSSO2)	I/O	SPI slave chip select input/master chip select 2 output
				PG5	O	PWM channel 5 output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
				P26	I/O	GPIO configures input and output pull up, down and other functions through registers
			31	AN22	AI	ADC channel 22 input
				ADET	I	ADC external trigger input
				INT0	I	External interrupt 0 input
				NSS (NSSO3)	I/O	SPI slave chip select input/master chip select 3 output
				TXD1	O	UART1data output
				RXD1	I/O	UART1Data input/synchronous mode data output
				P27	I/O	GPIO configures input and output pull up, down and other functions through registers
			32	AN23	AI	ADC channel 23 input
				INT0	I	External interrupt 0 input
				INT1	I	External interrupt 1 input
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
				P50	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN39	AI	ADC channel 39 input
			1	NRST	I	External reset input
				SCL	I/O	I2C clock input and output
				SCLK	I/O	SPI clock input and output
				PG0	O	PWM channel 0 output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
				P51	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN40	AI	ADC channel 40 input
			2	OSCIN1	AI	External oscillation HSE/LSE input port 1
				SDA	I/O	I2Cdata input and output
				MOSI	I/O	SPI data master sending and slave receiving
				PG1	O	PWM channel 1 output
				TXD1	O	UART1data output
				RXD1	I/O	UART1Data input/synchronous mode data output

Pin number				Pin Function	Pin Type	Pin description
CMS8S5887		CMS8S 5888	CMS8S 5889			
TSSOP20	QFN20	QFN24	QFN32			
-	-	8	3	P52	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN41	AI	ADC channel 41 input
				OSCOUT1	AO	External oscillation HSE/LSE output port 1
				MISO	I/O	SPI data master receiving and slave sending
				PG2	O	PWM channel 2 output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
16	13	10	6	P53	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN42	AI	ADC channel 42 input
				DSDA1	I/O	Programming/debugging data input and output port 1
				NSS (NSSO0)	I/O	SPI slave chip select input/master chip select 0 output
				PG3	O	PWM channel 3 output
				TXD1	O	UART1 data output
				RXD1	I/O	UART1 Data input/synchronous mode data output
17	14	11	7	P54	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN43	AI	ADC channel 43 input
				DSCK1	I	Programming/debugging clock input port1
				TXD0	O	UART 0 data output
				NSS (NSSO1)	I/O	SPI slave chip select input/master chip select 1 output
				PG4	O	PWM channel 4 output
				TXD1	O	UART1 data output
-	-	-	8	RXD1	I/O	UART1 data input/synchronization mode
				P55	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN44	AI	ADC channel 44 input
				RXD0	I/O	UART0Data input/synchronous mode data output
				NSS (NSSO2)	I/O	SPI slave chip select input/master chip select 2 output
				PG5	O	PWM channel 5 output
				TXD1	O	UART1 data output
10	7	-	-	RXD1	I/O	UART1Data input/synchronous mode data output
				P57	I/O	GPIO configures input and output pull up, down and other functions through registers
				AN46	AI	ADC channel 46 input
				PG5	O	PWM channel 5 output
				TXD1	O	UART1 data output
9	6	9	5	RXD1	I/O	UART1 Data input/synchronous mode data output
				VDD	P	Power supply voltage input pin

Pin number				Pin Function	Pin Type	Pin description
CMS8S5887	CMS8S 5888	CMS8S 5889				
TSSOP20	QFN20	QFN24	QFN32			
7	4	7	4	VSS/GND	P	Ground pin

3.3 GPIO Features

The pins share multiple functions, and each I/O port can be configured as any digital function or designated analog function. I/O as a general GPIO port has the following characteristics:

- Configurable 2 levels of I/O output slope.
- Can read data latch status or pin status.
- Configurable rising edge, falling edge, double edge trigger interrupt.
- Configurable rising edge, falling edge, double edge interrupt to wake up the chip.
- Can be configured as normal input, pull-up input, pull-down input, push-pull output, open-drain output mode.

3.4 Pin Function List

List of digital function ports:

	External input	Digital function configuration							
		0	1	2	3	4	5	6	7
P00	-	GPIO	ANA	SCL	SCLK	CC0	PG0	TXD1	RXD1
P01	-	GPIO	ANA	SDA	MOSI	CC1	PG1	TXD1	RXD1
P02	T0G/T1G/T2EX	GPIO	ANA	-	MISO	CC2	PG2	TXD1	RXD1
P03	T0/T1/T2	GPIO	ANA	-	NSS(NSSO0)	CC3	PG3	TXD1	RXD1
P04	-	GPIO	ANA	TXD0	NSS(NSSO1)	-	PG4	TXD1	RXD1
P05	-	GPIO	ANA	RXD0	NSS(NSSO2)	-	PG5	TXD1	RXD1
P06	ADET/INT0	GPIO	ANA	-	NSS(NSSO3)	BUZZ	-	TXD1	RXD1
P07	INT0/INT1	GPIO	ANA	-	-	CLO	-	TXD1	RXD1
P10	-	GPIO	ANA	SCL	SCLK	-	PG0	TXD1	RXD1
P11	-	GPIO	ANA	SDA	MOSI	-	PG1	TXD1	RXD1
P12	T0G/T1G/T2EX	GPIO	ANA	-	MISO	-	PG2	TXD1	RXD1
P13	T0/T1/T2	GPIO	ANA	-	NSS(NSSO0)	-	PG3	TXD1	RXD1
P14	CAP0	GPIO	ANA	TXD0	NSS(NSSO1)	-	PG4	TXD1	RXD1
P15	CAP1	GPIO	ANA	RXD0	NSS(NSSO2)	-	PG5	TXD1	RXD1
P16	CAP2	GPIO	ANA	-	NSS(NSSO3)	BUZZ	-	TXD1	RXD1
P17	CAP3	GPIO	ANA	-	-	CLO	-	TXD1	RXD1
P20	-	GPIO	ANA	SCL	SCLK	CC0	PG0	TXD1	RXD1
P21	-	GPIO	ANA	SDA	MOSI	CC1	PG1	TXD1	RXD1
P22	T0G/T1G/T2EX	GPIO	ANA	-	MISO	CC2	PG2	TXD1	RXD1
P23	T0/T1/T2	GPIO	ANA	-	NSS(NSSO0)	CC3	PG3	TXD1	RXD1
P24	-	GPIO	ANA	TXD0	NSS(NSSO1)	-	PG4	TXD1	RXD1
P25	-	GPIO	ANA	RXD0	NSS(NSSO2)	-	PG5	TXD1	RXD1
P26	ADET/INT0	GPIO	ANA	-	NSS(NSSO3)	-	-	TXD1	RXD1
P27	INT0/INT1	GPIO	ANA	-	-	-	-	TXD1	RXD1
P50	NSRT	GPIO	ANA	SCL	SCLK	-	PG0	TXD1	RXD1
P51	-	GPIO	ANA	SDA	MOSI	-	PG1	TXD1	RXD1
P52	-	GPIO	ANA	-	MISO	-	PG2	TXD1	RXD1
P53	-	GPIO	ANA	-	NSS(NSSO0)	-	PG3	TXD1	RXD1
P54	-	GPIO	ANA	TXD0	NSS(NSSO1)	-	PG4	TXD1	RXD1
P55	-	GPIO	ANA	RXD0	NSS(NSSO2)	-	PG5	TXD1	RXD1
P57	-	GPIO	ANA			-	PG5	TXD1	RXD1

Analog port, CONFIG configuration port list:

	ANA(1)						CONFIG
	ADC						
P00	AN0						-
P01	AN1						-
P02	AN2						DSDA2
P03	AN3						DSCK2
P04	AN4						-
P05	AN5						-
P06	AN6						
P07	AN7						
P10	AN8						-
P11	AN9						OSCIN2
P12	AN10						OSCOUT2
P13	AN11						
P14	AN12						
P15	AN13						
P16	AN14						-
P17	AN15						
P20	AN16						-
P21	AN17						-
P22	AN18						-
P23	AN19						
P24	AN20						
P25	AN21						-
P26	AN22						
P27	AN23						
P50	AN39						NRST
P51	AN40						OSCIN1
P52	AN41						OSCOUT1
P53	AN42						DSDA1
P54	AN43						DSCK1
P55	AN44						
P57	AN46						-

Note: 1. The chip pins are subject to the actual chip.

4. Function Summary

4.1 System Clock

The system clock has 4 kinds of clock sources, which can be selected through the setting of the system configuration register or the user register. The system clock module has the following characteristics:

- Optional internal high-speed oscillation HIS (48MHz).
- Optional external high-speed crystal oscillator HSE (8MHz/16MHz).
- Optional external low-speed crystal oscillator LSE (32.768KHz).
- Optional internal low-speed oscillation LSI (125KHz).
- Any pair of clock sources can be switched between each other (switching between HSE and LSE is prohibited).
- The external high-speed and low-speed oscillators support the stop vibration monitoring function (SCM) when the system clock is provided.

4.2 Reset

The reset operation is used to complete the initialization of the internal circuit of the chip, so that the system starts working from a certain state. The chip has the following reset methods:

- Power-on reset.
- External reset.
- Low voltage reset.
- CONFIG state protection reset.
- Power-on configuration monitoring reset.
- Watchdog timeout reset.
- Software reset.

Any of the above reset situations requires a certain response time, and the system provides a complete reset process to ensure the smooth progress of the reset action.

4.3 Power Management

4.3.1 Operating Mode

The chip has 3 different working modes to meet the power consumption requirements of different applications.

- Normal working mode: MCU is in normal working state and peripherals are operating normally.
- Idle mode IDLE: MCU is in idle mode, CPU stops working, and peripherals operate normally. This mode can be awakened by any interrupt.
- Sleep mode STOP: MCU is in sleep mode, CPU stops working, and peripherals stop working. This mode can be awakened by INT0/1 interrupt, external interrupt, WUT timing wakeup, LSE timing wakeup.

4.3.2 Power Supply Low Voltage Reset (LVR)

When the power supply voltage is lower than the set detection voltage, the system resets.

There are 4 options for low voltage reset: 1.8V/2.0V/2.5V/3.5V.

4.3.3 Power Supply Low Voltage Detection (LVD)

The low voltage detection circuit compares the power supply voltage with the set voltage, and if the power supply voltage is lower than the set voltage, an interrupt request signal is generated.

Settable detection voltage range 2.0V~4.3V, A total of 8 levels are available.

4.4 Interrupt Control

The chip has multiple interrupt sources and interrupt vectors. The user-settable interrupts include INT0/1, Timer0/1, Timer2, Timer3/4, WDT, LSE_Timer (SCM), PWM, I2C, SPI, UART0/1, P0/P1/P2/P5, ADC, LVD, the actual number of interrupt sources varies by product.

The chip stipulates two interrupt priority levels, which can realize two-level interrupt nesting. When an interrupt has been responded, if a high-level interrupt sends a request, the latter can interrupt the former to achieve interrupt nesting.

4.5 Timer

4.5.1 WDT Timer

The watchdog timer is an on-chip timer whose clock source is provided by the system clock. The WDT timeout will generate a reset. The watchdog reset is a protection setting of the system. When the system runs to an unknown state, the watchdog can be used to reset the system, thereby avoiding the system from entering an infinite loop. The WDT timer has the following characteristics:

- 8 levels of watchdog overflow time are selectable.
- Watchdog overflow interrupt can be set.
- Watchdog overflow reset can be set.

4.5.2 Timer Counter 0/1 (Timer0/1)

Timer 0 is similar in type and structure to Timer 1, and is two 16-bit up-counting timers. Timer0 has 4 working modes, Timer1 has 3 working modes, they provide basic timing and event counting operations.

In "timer mode", the timer register is incremented every 12 or 4 system cycles when the timer clock is enabled. In the "counter mode", the timing register will increase whenever it detects a falling edge on the corresponding input pin (T0 or T1). Timer0/1 has the following features:

- Can be used as a normal timer.
- Can be used for gated timing function.
- External counting function can be realized.
- Can be used for gated counting function.
- Counter overflow interrupt.

4.5.3 Timer Counter 2 (Timer2)

Timer 2 is a 16-bit timer, which can be used for various digital signal generation and event capture, such as pulse generation, pulse width modulation, pulse width measurement, etc. Timer2 has the following characteristics:

- Can be used as a normal timer.
- Can be used for gated timing function.
- External counting function can be realized.
- With reinstall prohibition, overflow auto reinstall, external pin falling edge auto reinstall function.
- Capture can be triggered by rising edge, falling edge, both edges or writing the low byte of the capture register.
- With a comparison function, this function can generate a periodic signal and a PWM waveform with a controllable duty cycle.
- Interrupts can be generated for timing, external trigger, capture, and comparison.

4.5.4 Timer 3/4(Timer3/4)

Timer 3/4 is similar to timer 0/1 and is two 16-bit timers. Timer3 has 4 working modes, and Timer4 has 3 working modes. Compared with Timer0/1, Timer3/4 only provides timing operation.

When the timer is started, the value of the register (counter) is incremented every 12 or 4 system cycles.

4.5.5 LSE Timer (LSE_Timer)

The LSE timer is a 16-bit up-counting timer with a clock source from the external low-speed clock LSE. The LSE timer has the following characteristics:

- Timing function.
- 16-bit timing value can be set.
- Can work normally in sleep mode.
- An interrupt can be generated when the count value is equal to the timer value.

Timed interrupt can wake up idle mode/sleep mode.

4.5.6 Wake-up Timer (WUT)

WUT wake-up timer is a 12-bit, up-counting timer used for wake-up from sleep and a clock source from the internal low-speed clock LSI. After the system enters the sleep mode, the CPU and all peripheral circuits stop working, and the internal low-speed clock LSI provides the clock for the WUT counter. WUT has the following characteristics:

- The system can be woken up regularly in sleep mode.
- Count clock can be divided by 1, 8, 32, 256.
- 12-bit timing value can be set.

4.5.7 BRT Timer (BRT)

The BRT timer is a 16-bit baud rate timer whose clock source comes from the system clock. It mainly provides the clock for the UART module. BRT has the following characteristics:

- With independent control switch.
- Counting clock has 8 frequency division options.
- 16-bit up counting.

4.6 Enhanced Digital Peripherals

4.6.1 Cyclic Redundancy Check (CRC)

Cyclic Redundancy Check CRC is the most commonly used error check code in the field of data communication. Its characteristic is that the length of the information field and the check field can be arbitrarily selected. The chip CRC check unit generates a polynomial using “ $X^{16}+X^{12}+X^5+1$ ”(CRC16-CCITT), , specify the data to be verified through the program, so that the module is not limited to the code flash area but can be used for multi-purpose inspection.

4.6.2 BUZZER

The buzzer driver is composed of an 8-bit counter, a clock driver, and a control register. It outputs a square wave with a duty cycle of 50%, and its frequency covers a wide range. BUZZER has the following characteristics:

- With separate enable control switch.
- A total of 4 levels of system clock divider ratios of 8, 16, 32, 64 can be set.
- Output frequency 8-bit control, can be set (1~255) x 2 frequency division output.

4.6.3 PWM

PWM module supports 6 PWM generators, and the period and duty cycle can be set independently. PWM has the following characteristics:

- Support 2 kinds of waveform output in single and continuous mode.
- Support 4 control modes: independent, complementary, synchronous and group control.
- Count clock can be divided by 1, 2, 4, 8, 16.
- Support edge alignment mode.
- Support dead zone programming.
- Output polarity can be set.
- Support cycle, compare down, zero interrupt.

4.7 Communication Module

4.7.1 SPI Module

SPI is a fully configurable SPI master/slave device that allows users to configure the polarity and phase of the serial clock signal. SPI allows the MCU to communicate with serial peripherals, and it can also communicate between processors in a multi-host system. SPI has the following characteristics:

- Full-duplex synchronous serial data transmission.
- Support master/slave mode.
- Support multi-host system.
- System error detection.
- Support speed up to 1/4 of the system clock ($F_{sys} \leq 24MHz$).
- Bit rate generates 1/4, 1/8, 1/16, 1/32, 1/64, 1/128, 1/256, 1/512 of the system clock.
- Support four transmission formats.
- Send/receive complete can generate interrupt.

4.7.2 I²C Module

The two-wire bidirectional serial bus controller I²C provides a simple and effective connection method for data exchange between the microprocessor and the I²C bus. The I²C module has the following characteristics:

- Support 4 working methods: master sending, master receiving, slave sending, slave receiving.
- Support 2 transmission speed modes:
 - Standard (up to 100Kb/s);
 - Fast (up to 400Kb/s) .
- Perform arbitration and clock synchronization.
- Support multi-host system.
- The host method supports 7-bit addressing mode and 10-bit addressing mode on the I²C bus (software support).
- The slave method supports 7-bit addressing mode on the I²C bus.
- Allows operation in a wide range of clock frequencies (built-in 8-bit timer).
- An interrupt can be generated when receiving/sending is complete.

4.7.3 UARTn Module

The UARTn module contains UART0 / UART1, 2 serial ports with the same function. UARTn has the following characteristics:

- Full-duplex serial port.
- Support synchronous mode.
- Support 8-bit asynchronous transceiver mode with variable baud rate.
- Support 9-bit asynchronous transceiver mode with variable baud rate.
- Baud rate can be generated by Timer1/Timer4/Timer2/BRT module.
- Send/receive complete can generate interrupt.

4.8 Analog Module

4.8.1 Analog to Digital Conversion (ADC)

ADC module is a 12-bit successive approximation analog-to-digital converter. The port analog input signal is connected to the input of the analog-to-digital converter after passing through the multiplexer. The analog-to-digital converter generates a 12-bit binary result according to the input analog signal and saves the result in the ADC result register. ADC has the following characteristics:

- Up to 30 external channels.
- ADC conversion clock has 8 clock frequencies to choose from.
- ADC reference voltage can choose VDD/1.2V/2.0V/2.4V/3.0V.
- A complete 12-bit conversion requires 18.5 ADC conversion cycles.
- Support external port edge, PWM trigger ADC conversion.
- Support ADC conversion result comparison output.
- Support ADC conversion completion to generate interrupt.

4.9 FLASH Memory

FLASH memory includes program memory (APROM/BOOT) and non-volatile data memory (Data FLASH). It can be accessed through the relevant special function register (SFR) to realize the IAP function. FLASH memory supports the following operations:

- Byte read operation.
- Byte Write operation.
- Page erase operation.
- FLASH space CRC check operation.

4.10 Unique ID (UID)

Each chip has a 96-bit unique identification number, namely Unique identification. The UID has been set at the factory and cannot be modified by the user.

5. User Configuration

The system configuration register (CONFIG) is the FLASH option of the MCU's initial conditions, and the program cannot access and operate it. The following contents can be set through the system configuration register:

- Watchdog's working method.
- FLASH program area partition protection, code encryption, FLASH data area encryption status.
- Low voltage reset voltage.
- Disable or enable debug mode.
- Debug pin selection.
- Oscillation method, prescaler selection.
- Internal high-speed oscillator frequency division selection.
- Crystal oscillator port selection.
- Sleep wake-up waiting time.
- APROM/BOOT space.

6. Electrical Parameters

6.1 Absolute Maximum Rating

Symbol	Parameter	Min	Max	Unit
T _{ST}	Storage temperature	-55	150	°C
T _A	Working temperature	-40	105	°C
V _{DD} -V _{SS}	Power supply voltage	-0.3	5.8	V
V _{IN}	Input voltage	V _{SS} -0.3	V _{DD} +0.3	V
I _{DD}	VDD maximum input current	-	120	mA
I _{SS}	VSS maximum output current	-	200	mA
I _{IO}	Maximum sink current of a single IO	-	50	mA
	Maximum source current of a single IO	-	40	mA
	Maximum sink current of all IOs	-	200	mA
	Maximum source current of all IOs	-	120	mA

Note: If the operating conditions of the device exceed the range of "absolute maximum rating", it will cause permanent damage to the device. The function can be guaranteed only when the device works within the scope specified in the manual. The chip is at the absolute maximum rated value, which may affect the reliability of the device.

6.2 DC Electrical Characteristics

$V_{DD}-V_{SS}=2.1\sim 5.5V, T_A=25^{\circ}C$

Symbol	Parameter	Test condition	Min	Typ	Max	Unit
V_{DD}	Working voltage	$F_{SYS}=48MHz$, machine cycle=2T $F_{SYS}=8MHz\sim 24MHz$, machine cycle=1T	2.1	-	5.5	V
I_{DD}	Normal mode	$V_{DD}=5V$, $F_{SYS}=48MHz$, all peripherals are off machine cycle=2T	-	7	-	mA
		$V_{DD}=3V$, $F_{SYS}=48MHz$, all peripherals are off machine cycle=2T	-	7	-	mA
		$V_{DD}=5V$, $F_{SYS}=24MHz$, all peripherals are off machine cycle=1T	-	5	-	mA
		$V_{DD}=3V$, $F_{SYS}=24MHz$, all peripherals are off machine cycle=1T	-	5	-	mA
		$V_{DD}=5V$, $F_{SYS}=16MHz$, all peripherals are off machine cycle=1T	-	4	-	mA
		$V_{DD}=3V$, $F_{SYS}=16MHz$, all peripherals are off machine cycle=1T	-	4	-	mA
		$V_{DD}=5V$, $F_{SYS}=8MHz$, all peripherals are off machine cycle=1T	-	3	-	mA
		$V_{DD}=3V$, $F_{SYS}=8MHz$, all peripherals are off machine cycle=1T	-	3	-	mA
		$V_{DD}=5V$, $F_{SYS}=32.768KHz$, all peripherals are off machine cycle=1T	-	0.26	-	mA
		$V_{DD}=3V$, $F_{SYS}=32.768KHz$, all peripherals are off machine cycle=1T	-	0.23	-	mA
	IDLE mode	$V_{DD}=5V$, $F_{SYS}=48MHz$, all peripherals are off	-	5.5	-	mA
		$V_{DD}=3V$, $F_{SYS}=48MHz$, all peripherals are off	-	5.5	-	mA
		$V_{DD}=5V$, $F_{SYS}=24MHz$, all peripherals are off	-	3.5	-	mA
		$V_{DD}=3V$, $F_{SYS}=24MHz$, all peripherals are off	-	3.5	-	mA
		$V_{DD}=5V$, $F_{SYS}=16MHz$, all peripherals are off	-	2.5	-	mA
		$V_{DD}=3V$, $F_{SYS}=16MHz$, all peripherals are off	-	2.5	-	mA
		$V_{DD}=5V$, $F_{SYS}=8MHz$, all peripherals are off	-	2	-	mA
		$V_{DD}=3V$, $F_{SYS}=8MHz$, all peripherals are off	-	2	-	mA
		$V_{DD}=5V$, $F_{SYS}=32.768KHz$, all peripherals are off	-	0.26	-	mA
		$V_{DD}=3V$, $F_{SYS}=32.768KHz$, all peripherals are off	-	0.23	-	mA
I_{SLEEP1}	sleep current	all peripherals are off, LSE timer enable	-	20	-	uA
I_{SLEEP2}	sleep current	all peripherals are off, LSI、WUT timer enable	-	7	-	uA
I_{SLEEP3}	sleep current	all peripherals are off	-	6	-	uA
I_{LI}	Input leakage	-	-	-	0.1	uA
V_{IL}	Input low level	-	V_{SS}	-	0.3 V_{DD}	V
V_{IH}	Input high level	-	$0.7V_{DD}$	-	V_{DD}	V
V_{OL}	Low output voltage	$V_{DD}=5V$, $I_{OL1}=18mA$	-	-	0.4	V
		$V_{DD}=3V$, $I_{OL1}=12mA$	-	-	0.4	V
V_{OH}	Output high voltage	$V_{DD}=5V$, $I_{OH1}=35mA$	3.5	-	-	V
		$V_{DD}=3V$, $I_{OH1}=13.5mA$	2.1	-	-	V
R_{PH}	Pull-up resistor	-	-	32	-	$K\Omega$
R_{PL}	Pull-down resistor	-	-	32	-	$K\Omega$

6.3 AC Electrical Parameter

6.3.1 Power-up and power-down Operations

$T_A=25^\circ\text{C}$, does not include 32.768K crystal oscillator start-up time

Symbol	Parameter	Test condition	Min	Typ	Max	Unit
T_{RESET}	Reset time	$V_{DD}=5\text{V}$	-	16	-	ms
$TVDDR$	V_{DD} rise rate	$V_{DD}=5\text{V}$	20	-	-	us/V
$TVDDF$	V_{DD} fall rate	$V_{DD}=5\text{V}$	20	-	-	us/V

6.3.2 External Oscillator

Symbol	Parameter	Test condition	Min	Typ	Max	Unit
V_{HSE}	Working voltage	$F=8/16\text{MHz}$, $C_{XT}=0-47\text{pF}$	2.1	-	5.5	V
V_{LSE}	Working voltage	$F=32.768\text{KHz}$, $C_{XT}=10-22\text{pF}$	2.1	-	5.5	V

6.3.3 Internal Oscillator

$V_{DD}=2.1\text{V}-5.5\text{V}$

Symbol	Parameter	Test condition	Frequency error	Min	Typ	Max	Unit
F_{HSI}	Internal high speed 48MHz	$T_A=25^\circ\text{C}$	$\pm 1\%$	-	48	-	MHz
		$T_A=-20^\circ\text{C}$ to 85°C	$\pm 2\%$	-	48	-	MHz
		$T_A=-40^\circ\text{C}$ to 105°C	$\pm 3\%$	-	48	-	MHz
F_{LSI}	Internal low speed 125KHz	$T_A=25^\circ\text{C}$	$\pm 5\%$	-	125	-	KHz
		$T_A= -40^\circ\text{C}$ to 105°C	$\pm 50\%$	-	125	-	KHz

6.3.4 Low Voltage Reset Electrical Parameter

Symbol	Parameter	Min	Typ	Max	Unit
V_{LVR1}	Low voltage detection threshold 1.8V	1.65	1.8	1.95	V
V_{LVR2}	Low voltage detection threshold 2.0V	1.85	2.0	2.15	V
V_{LVR3}	Low voltage detection threshold 2.5V	2.35	2.5	2.65	V
V_{LVR4}	Low voltage detection threshold 3.5V	3.35	3.5	3.65	V

6.3.5 LVD Electrical Parameter

Symbol	Parameter	Min	Typ	Max	Unit
V_{LVD1}	Low voltage detection threshold 2.00V	1.90	2.00	2.10	V
V_{LVD2}	Low voltage detection threshold 2.20V	2.10	2.20	2.30	V
V_{LVD3}	Low voltage detection threshold 2.40V	2.30	2.40	2.50	V
V_{LVD4}	Low voltage detection threshold 2.70V	2.60	2.70	2.80	V
V_{LVD5}	Low voltage detection threshold 3.00V	2.90	3.00	3.10	V
V_{LVD6}	Low voltage detection threshold 3.70V	3.60	3.70	3.80	V
V_{LVD7}	Low voltage detection threshold 4.00V	3.90	4.00	4.10	V
V_{LVD8}	Low voltage detection threshold 4.30V	4.20	4.30	4.40	V

6.4 FLASH Electrical Parameter

Symbol	Parameter	Test condition	Min	Typ	Max	Unit
V_F	FLASH working voltage	-	2.1	-	5.5	V
T_F	FLASH working temperature	-	-40	27	105	°C
$N_{ENDURANCE}$	Number of erasing and writing	Program FLASH	20000	-	-	Cycle
		Data Flash	100,000			Cycle
T_{RET}	Data retention time	25°C	100	-	-	year
T_{ERASE}	Sector erase time	-	-	1.5	-	ms
T_{PROG}	Programming time	-	-	7	-	us
I_{DD1}	Read current	-	-	-	2.5	mA
I_{DD2}	Programming current	-	-	-	3.6	mA
I_{DD3}	Erase current	-	-	-	2	mA

6.5 Analog Characteristics

6.5.1 BANDGAP Electrical Characteristics

$T_A=25^\circ\text{C}$

Symbol	Parameter	Test condition	Min	Typ	Max	Unit
V_{BG}	Internal reference 1.2V	$VDD=2.1\sim 5.5\text{V}, T_A=25^\circ\text{C}$	1.188	1.2	1.212	V
		$VDD=2.1\sim 5.5\text{V}, T_A=-20^\circ\text{C} \text{ to } 85^\circ\text{C}$	1.182	1.2	1.218	V
		$VDD=2.1\sim 5.5\text{V}, T_A=-40^\circ\text{C} \text{ to } 105^\circ\text{C}$	1.176	1.2	1.224	V

6.5.2 ADC Electrical Characteristics

$T_A=25^\circ\text{C}$

Symbol	Parameter	Min	Typ	Max	Unit	
V_{AVDD}	ADC working voltage	2.5	-	5.5	V	
V_{REF1}	Reference voltage 1	-	V_{AVDD}	-	V	
V_{REF2}	Reference voltage 2(Non- V_{BG})	1.185	1.2	1.215	V	
V_{REF3}	Reference voltage 3	1.985	2.0	2.015	V	
V_{REF4}	Reference voltage 4	2.385	2.4	2.415	V	
V_{REF5}	Reference voltage 5	2.985	3.0	3.015	V	
V_{ADI}	Input voltage	0	-	V_{REF}	V	
N_R	resolution	12			Bit	
DNL	Differential nonlinearity error ($V_{REF}=V_{AVDD}=5\text{V}, T_{ADCK}=0.5\text{us}$)	± 2			LSB	
INL	Integral nonlinearity error ($V_{REF}=V_{AVDD}=5\text{V}, T_{ADCK}=0.5\text{us}$)	± 4			LSB	
T_{ADCK}	ADC clock cycle	$V_{REF}=VDD=5\text{V}$	0.5	-	-	us
		$V_{REF}=V_{REF2}$	32	-	-	us
		$V_{REF}=V_{REF3}/V_{REF4}/V_{REF5}$	2	-	-	us
T_{ADC}	ADC conversion time	-	18.5	-	T_{ADCK}	
F_s	Sampling rate ($V_{REF}=V_{AVDD}=5\text{V}$)	100			Ksps	

Note: When $V_{REF} = V_{REF2}$, the precision is 8-bit.

6.6 EMC Characteristics

6.6.1 EFT Electrical Characteristics

Symbol	Parameter	Test condition	Level
V_{EFTB}	Fast transient voltage burst limits to be applied through 0.1uF(capacitance) on VDD and VSS pins to induce a functional disturbance	$T_A = +25^\circ C$, $F_{SYS}=48MHz$, conforms to IEC 61000-4-4	4B

Note: The electrical fast transient (EFT) immunity performance is closely related to system design (including power supply structure, circuit design, layout, chip configuration, program structure, etc.). The EFT parameter in the above table is the result measured on the CMS internal test platform, and is not suitable for all application environments. The test data is only for reference. All aspects of system design may affect EFT performance. In applications with high EFT performance requirements, attention should be paid to avoid interference sources affecting system operation when designing. It is recommended to analyze interference paths and optimize the design to achieve the best anti-interference performance.

6.6.2 ESD Electrical Characteristics


Symbol	Parameter	Test condition	Level
V_{ESD}	Electrostatic discharge (Human body model HBM)	$T_A = +25^\circ C$, JEDEC EIA/JESD22- A114	3B
	Electrostatic discharge (Machine discharge mode MM)	$T_A = +25^\circ C$, JEDEC EIA/JESD22- A115	C

6.6.3 Latch-Up Electrical Characteristics

Symbol	Parameter	Test condition	Test type
LU	Static latch-up class	JEDEC STANDARD NO.78D NOVEMBER 2011	Class I ($T_A = +25^\circ C$)


7. Package Information

7.1 TSSOP20

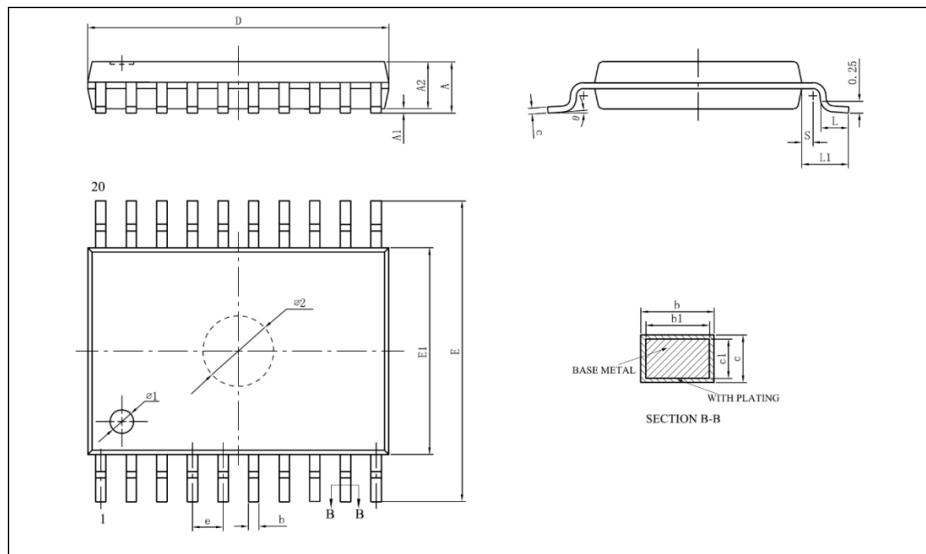


Symbol	Millimeter		
	Min	Nom	Max
A	-	-	1.20
A1	0.05	-	0.15
A2	0.80	1.00	1.05
A3	0.39	0.44	0.49
b	0.20	-	0.28
b1	0.19	0.22	0.25
c	0.13	-	0.17
c1	0.12	0.13	0.14
D	6.40	6.50	6.60
E1	4.30	4.40	4.50
E	6.20	6.40	6.60
e	0.65BSC		
L	0.45	0.60	0.75
L1	1.00REF		
θ	0	-	8°

7.2 QFN20

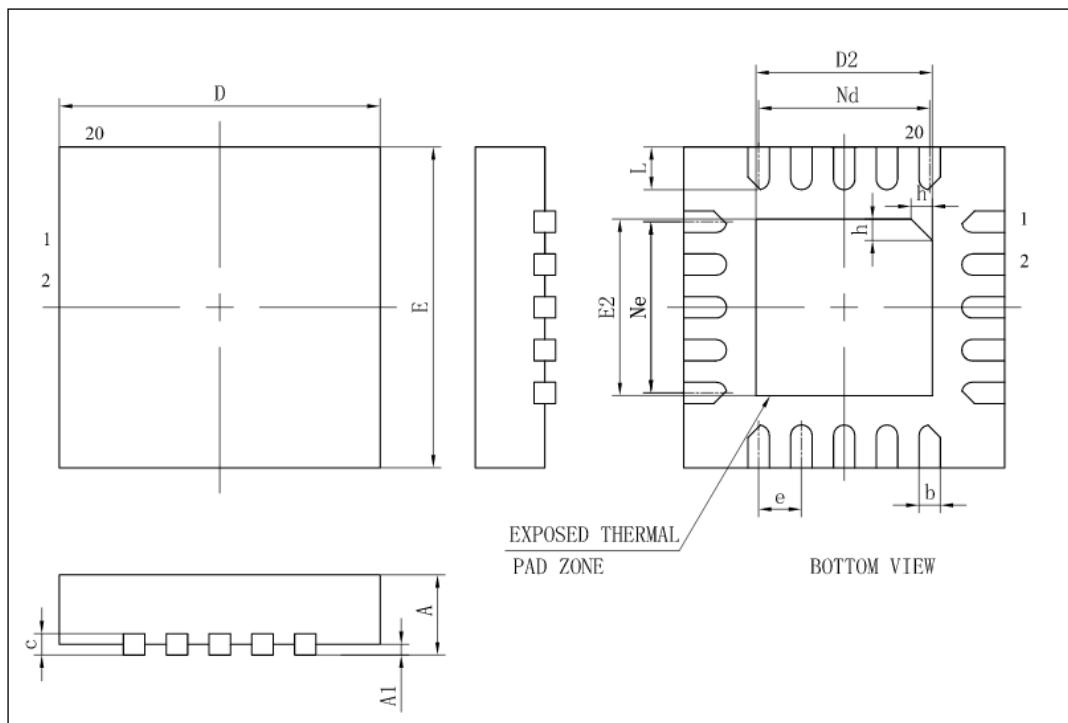


Symbol	Millimeter		
	Min	Nom	Max
A	0.70	0.75	0.80
A1	-	0.02	0.05
b	0.15	0.20	0.25
c	0.18	0.20	0.25
D	2.90	3.00	3.10
D2	1.55	1.65	1.75
e	0.40BSC		
Ne	1.60BSC		
Nd	1.60BSC		
E	2.90	3.00	3.10
E2	1.55	1.65	1.75
L	0.35	0.40	0.45
h	0.20	0.25	0.30

7.3 QFN24

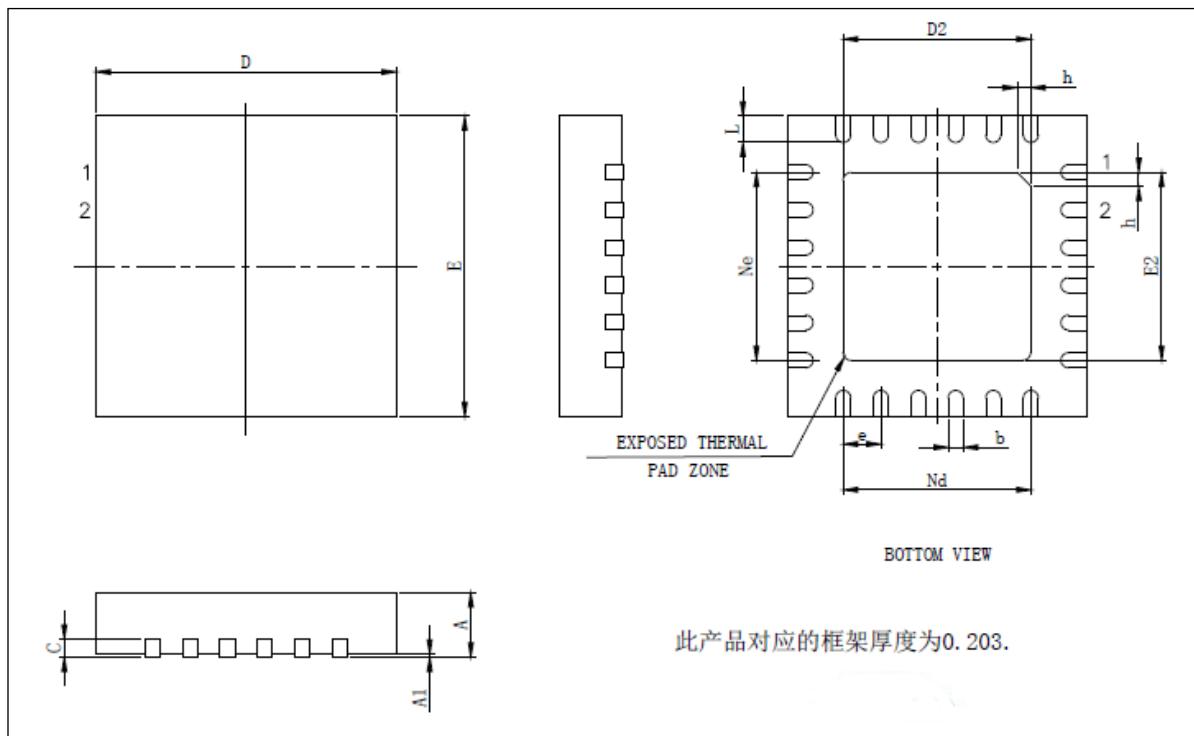

Symbol	Millimeter		
	Min	Nom	Max
A	0.70	0.75	0.80
A1	-	0.02	0.05
b	0.18	0.25	0.30
c	0.18	0.20	0.25
D	3.90	4.00	4.10
D2	2.40	2.50	2.60
e	0.50BSC		
Ne	2.50BSC		
Nd	2.50BSC		
E	3.90	4.00	4.10
E2	2.40	2.50	2.60
L	0.35	0.40	0.45
h	0.30	0.35	0.40

7.4 QFN32

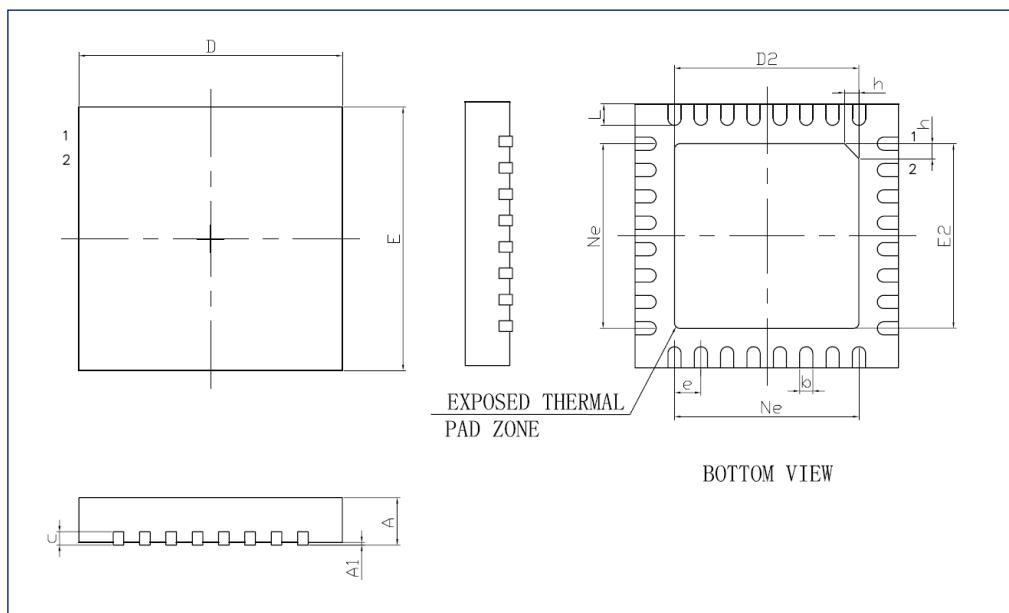

Symbol	Millimeter		
	Min	Nom	Max
A	0.70	0.75	0.80
A1	-	0.02	0.05
b	0.18	0.25	0.30
c	0.18	0.20	0.25
D	4.90	5.00	5.10
D2	3.40	3.50	3.60
e	0.50BSC		
Ne	3.50BSC		
E	4.90	5.00	5.10
E2	3.40	3.50	3.60
L	0.35	0.40	0.45
h	0.30	0.35	0.40

8. Revision History

Revision	Date	Modify content
V1.00	May 2020	Initial verison
V1.01	Jun 2021	Modify the function of some pins
V1.0.2	Apr 2023	<ul style="list-style-type: none">1) Add CMS8S5888 MCU information2) Update 6.6EMC Characteristics3) Unify Section 3.1 pin format
V1.0.3	Aug 2023	<ul style="list-style-type: none">1) 6.1 Absolute Maximum Rating: add limit parameter notes2) 6.3.1 Power-up and power-down Operations: adjust parameters3) 6.3.3 Internal Oscillator: adjust parameters4) 6.5.1 BANDGAP Electrical Characteristics: detailed parameters5) 6.5.2 ADC Electrical Characteristics: ADC clock cycle is described according to different reference voltages